

YTCZG



—

•

"

"

168

100 /V



200kV

.....6

.....6

.....6

.....8


.....10

.....12

.....13

.....13

.....13

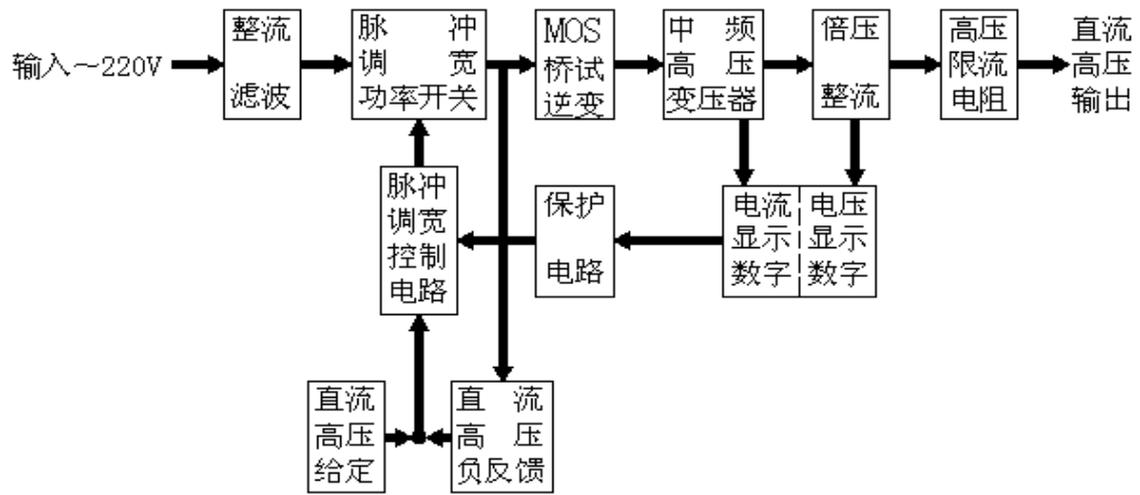


1

	PWM	IGBT
		3%
		0.5% 1% ±
1.0%± 2	± 1.0%± 2	
0.75U _{DC1mA}		± 3%± 2
	± 2%	

2

	200/2	200/3	200/5	300/2	300/3	300/5
(kV)	200	200	200	300	300	300
(mA)	2	3	5	2	2	5
(V)	400	600	1000	600	900	1500
(kg)	4.5	4.5	4.5	5.5	5.5	5.5
(kg)	7.9	7.9	8.3	11	11	11.5
(mm)	970	970	970	1250	1250	1250
	± (1.0% ± 2)					
	± (1.0% ± 2)					
	3%					
	± 10% 1%					
	10%					
	1.25					
	50HZ 220V± 10%					
	10					
	-10~40					
	25 85%					
	1500					
	1.5					
	0.75UDC1mA 3%					

1

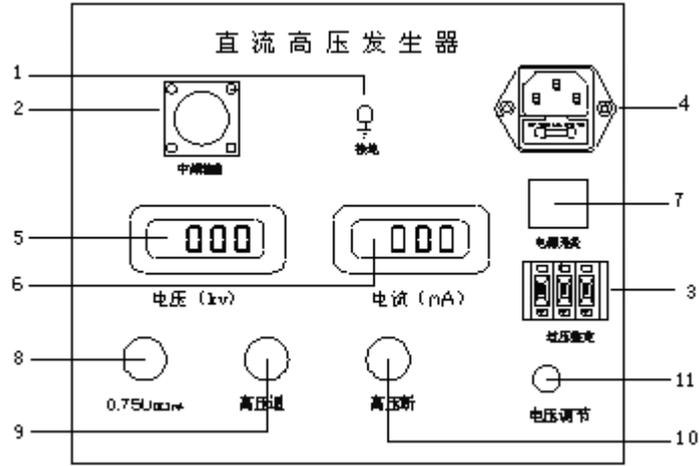

1

2

3

kV

1.1

4

(220V± 10

)

5

6

7

8

0 75U_{Dc}1mA

0.75%


9

0 75

10

11

2



1

2


3

4

5

6

3

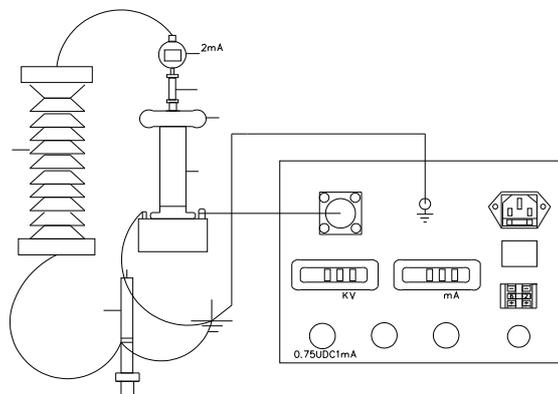

1

2

)

DHV

(

3.

1 1

4.

5.

6.

7.

8.

9.

10.

3—5kV

() 95

()

()

0.75UDC—1mA

UDC1mA

75

11.

12

a.


I

1

$$I_0 = I_1 - I'$$

b.

()

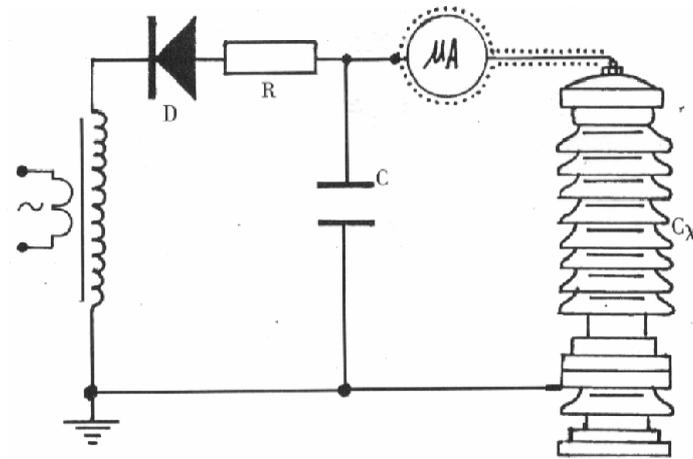

CX

()

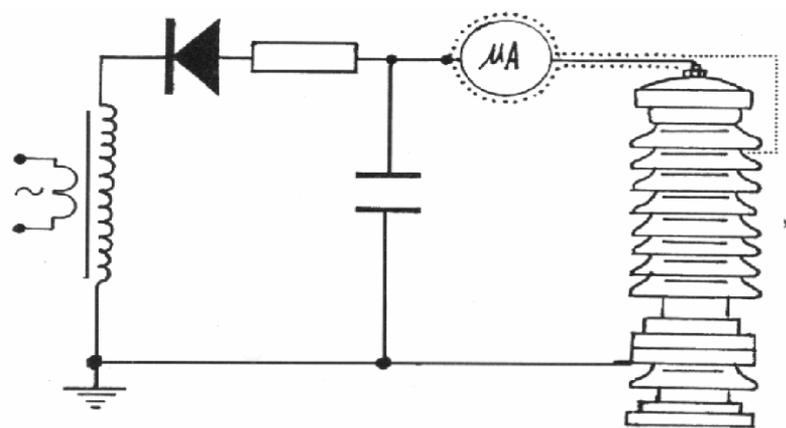


图 7b 排除试品 C_X 表面影响接线图

c.

()

()

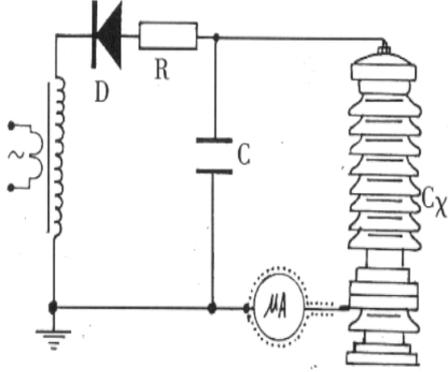


图 8a 微安表接入试品 C_X 底部的接线图

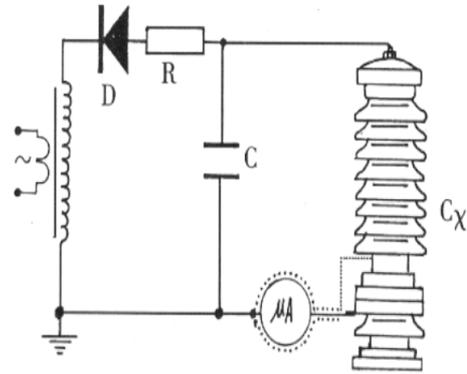


图 8b 排除试品 C_X 表面影响接线图

13.

20

14.

1		1 2	
2			
3			
4			

1	1
2	1
3	1
4	
5	1
6	1
7	1
8	1
9	1

1.

2

I SO9001

3.

" "

